
versatile™ 4C Mailbox, 4C11S-2P

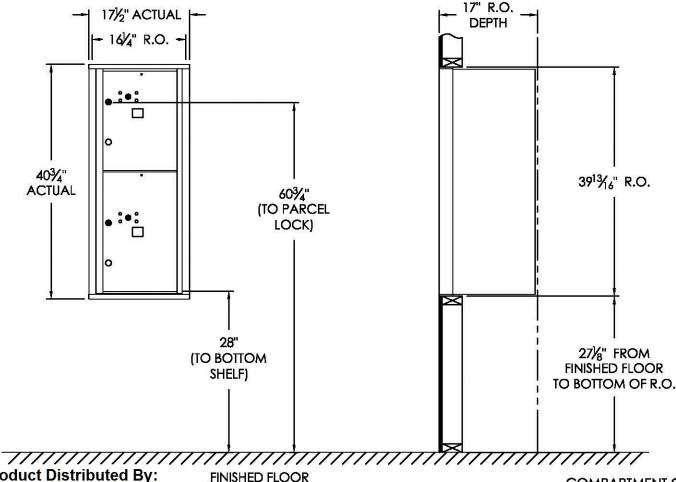

This Product Distributed By:

U.S. Mail Supply, Inc. 3065 North 124th Street

Brookfield, WI 53005-3857 Ph: 800-571-0147 / Fax: 800-589-1068 www.usmailsupply.com

Notes:

1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.

- a. At least one customer compartment shall be positioned less then 48" above finished floor (AFF).
- b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
- c. No patron (tenant) lock shall be positioned more than 67" AFF.
- d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
- e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
- 2. This 4C mailbox can also be used for private applications.
- The rough opening width for multi-unit 4C installations = (the sum of all actual unit widths) 1//s".

COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
PARCEL	PL5	17" H x 12" W x 15" D	1
PARCEL	PL6	20-1/2" H x 12" W x 15" D	(4)

PRODUCT SERIES: VERSATILETM 4C FRONT LOAD MAILBOX

manufacturing company

5935 Corporate Drive • Manhattan, KS 66503 www.florencemailboxes.com • (800) 275-1743 A GIBRALTAR INDUSTRIES COMPANY

D
AST REV DATE 5/10/14
DRAWN BY