


versatile™ 4C Mailbox, 4C13D-24

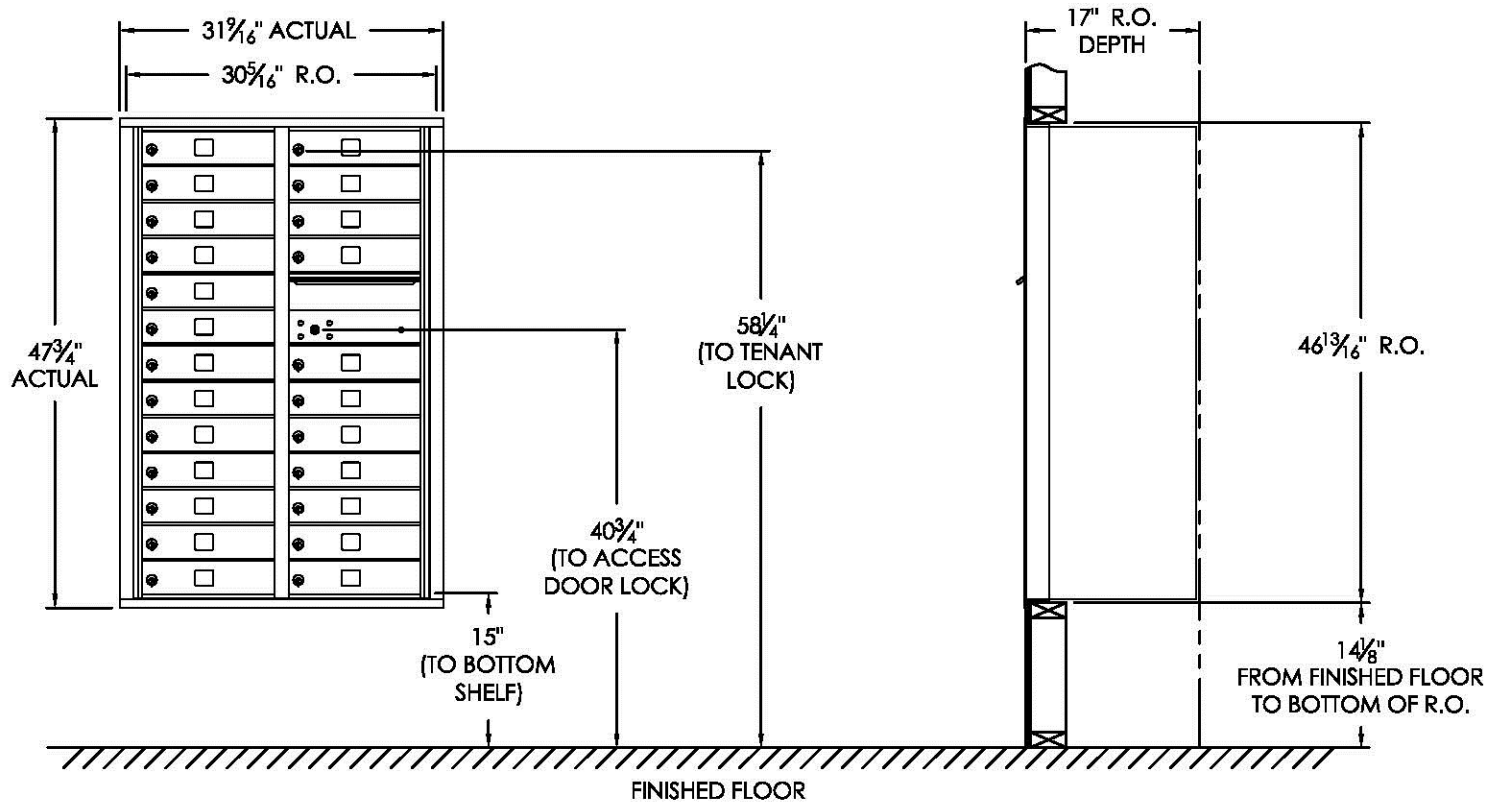

This Product Distributed By:

U.S. Mail Supply, Inc.

3065 North 124th Street
Brookfield, WI 53005-3857

Ph: 800-571-0147 / Fax: 800-589-1068
www.usmailsupply.com

COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
MAILBOX	MB1	3" H x 12" W x 15" D	24
OUTGOING MAIL	OM2	6-1/2" H x 12" W x 15" D	1

Notes:

- This module does NOT meet USPS STD-4C installation specification requirements as shown below:
 - At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
 - No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - No patron (tenant) lock shall be positioned more than 67" AFF.
 - No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - The USPS Arrow lock shall be positioned 36"- 48" AFF.
- This 4C mailbox is to be used for private applications.
- The rough opening width for multi-unit 4C installations = (the sum of all actual unit widths) - 1 1/8".

PRODUCT SERIES: VERSATILE™ 4C FRONT LOAD MAILBOX

AF FLORENCE
manufacturing company
5935 Corporate Drive • Manhattan, KS 66503
www.florencemailboxes.com • (800) 275-1747
A GIBRALTAR INDUSTRIES COMPANY

MODEL	4C13D-24	REV	B
SCALE	NONE	LAST REV DATE	5/15/2014
DRAWING NUMBER	4C13D-24CS	DRAWN BY	AFD