
## versatile™ 4C Mailbox, 4C16D-6P

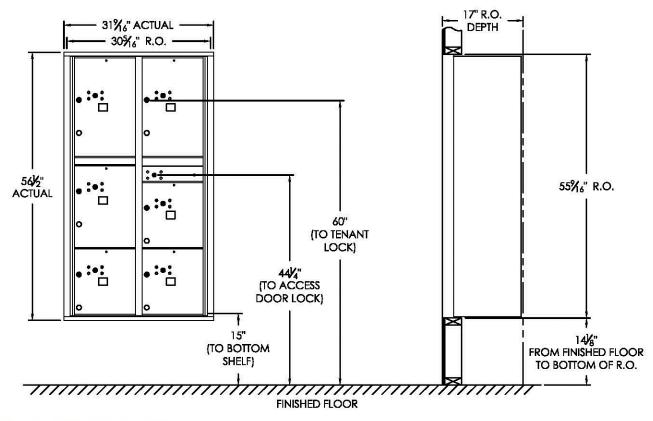

## This Product Distributed By: U.S. Mail Supply, Inc.

3065 North 124th Street Brookfield, WI 53005-3857 Ph: 800-571-0147 / Fax: 800-589-1068 www.usmailsupply.com

## COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.	
PARCEL	PL4	13-1/2" H x 12" W x 15" D	3	
PARCEL	PL5	17" H x 12" W x 15" D	1	
PARCEL	PL6	20-1/2" H x 12" W x 15" D	2	

## Notes:

- This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
  - a. At least one customer compartment shall be positioned less then 48" above finished floor (AFF).
  - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
  - c. No patron (tenant) lock shall be positioned more than 67" AFF.
  - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
  - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
- 2. This 4C mailbox can also be used for private applications.
- 3. The rough opening width for multi-unit 4C installations = (the sum of all actual unit widths) 11/8".

PRODUCT SERIES: VERSATILETM 4C FRONT LOAD MAILBOX



5935 Corporate Drive • Manhattan, K\$ 66503 www.florencemailboxes.com • (800) 275-1747

	MODEL 4C16D-6P	REV	С
,	SCALE NONE	LAST REV DATE 5/12/2014	
3	DRAWING NUMBER		DRAWN BY
7	4C16D-6PCS		SDH