# versatile™ 4C Mailbox, 4C14S-06

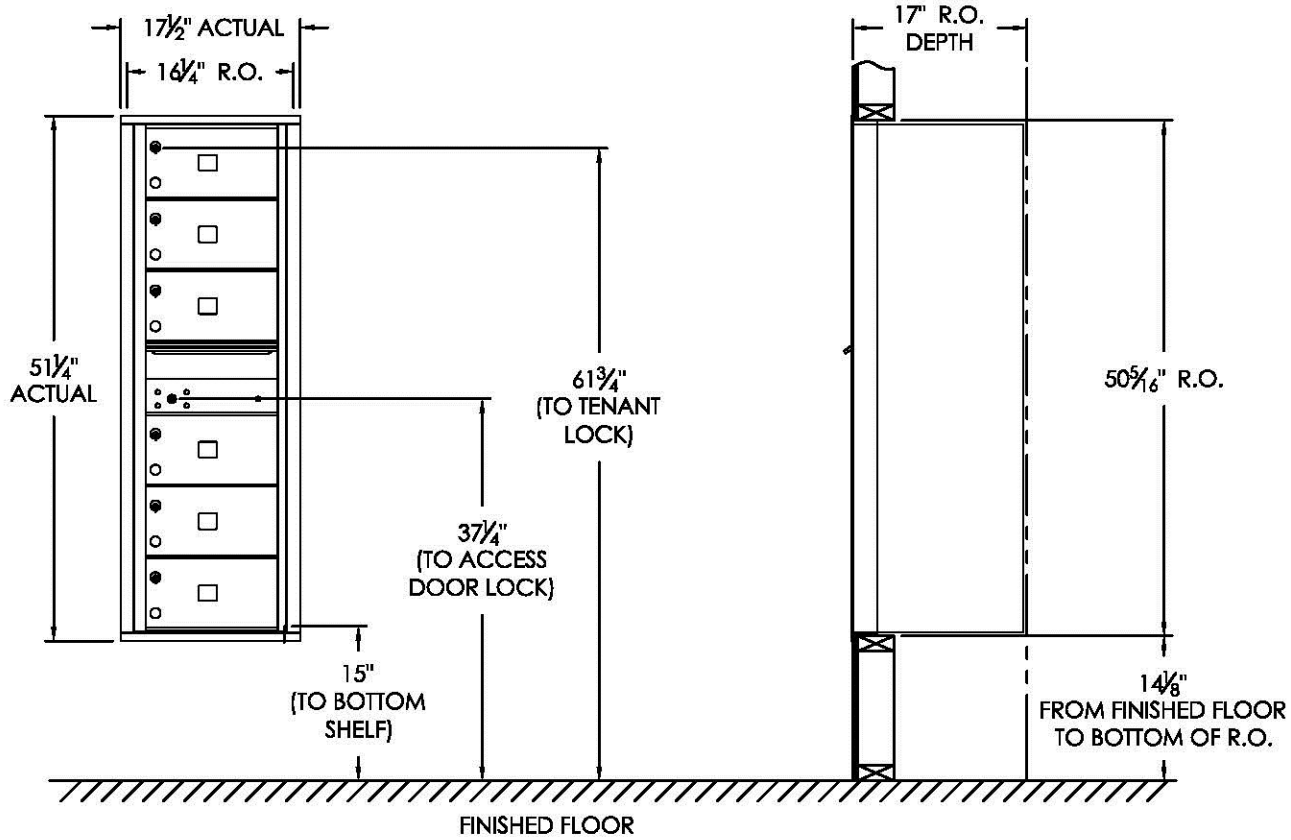


**This Product Distributed By:**
**U.S. Mail Supply, Inc.**
3065 North 124th Street
Brookfield, WI 53005-3857
Ph: 800-571-0147 / Fax: 800-589-1068
www.usmailsupply.com

COMPARTMENT CHART

| DESCRIPTION | COMPARTMENT | COMPARTMENT SIZE | QTY. |
|---|---|---|---|
| MAILBOX | MB2 | 6-1/2" H x 12" W x 15" D | 6 |
| OUTGOING MAIL | OM2 | 6-1/2" H x 12" W x 15" D | 1 |

Notes:
1. This module does NOT meet USPS STD-4C installation specification requirements as shown below:
   a. At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
   b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
   c. No patron (tenant) lock shall be positioned more than 67" AFF.
   d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
   e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
2. This 4C mailbox is to be used for private applications.
3. The rough opening width for multi-unit 4C installations = (the sum of all actual unit widths) - 1⅛".

PRODUCT SERIES: VERSATILE™ 4C FRONT LOAD MAILBOX

FLORENCE manufacturing company
5935 Corporate Drive • Manhattan, KS 66503
www.florencemailboxes.com • (800) 275-1747
A GIBRALTAR INDUSTRIES COMPANY

| | | | |
|---|---|---|---|
| MODEL | 4C14S-06 | REV | D |
| SCALE | NONE | LAST REV DATE | 5/16/2014 |
| DRAWING NUMBER | 4C14S-06CS | DRAWN BY | AFD |