


**Elevation  
Dimensions**

Overall Width: 1'  
6-5/8"

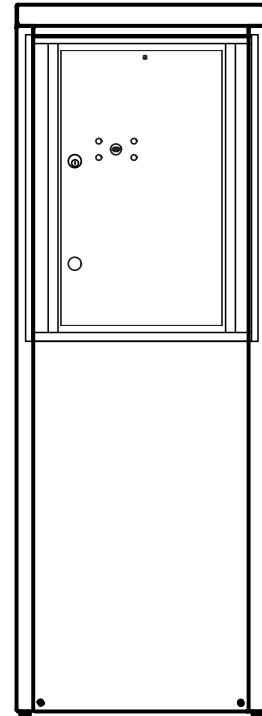


4C06S-1P-D

**U.S. MAIL SUPPLY**  
America's Mailbox Headquarters

262-782-6510 Toll Free: 800-571-0147

3065 N 124th St, Brookfield, WI 53005

**Side View**

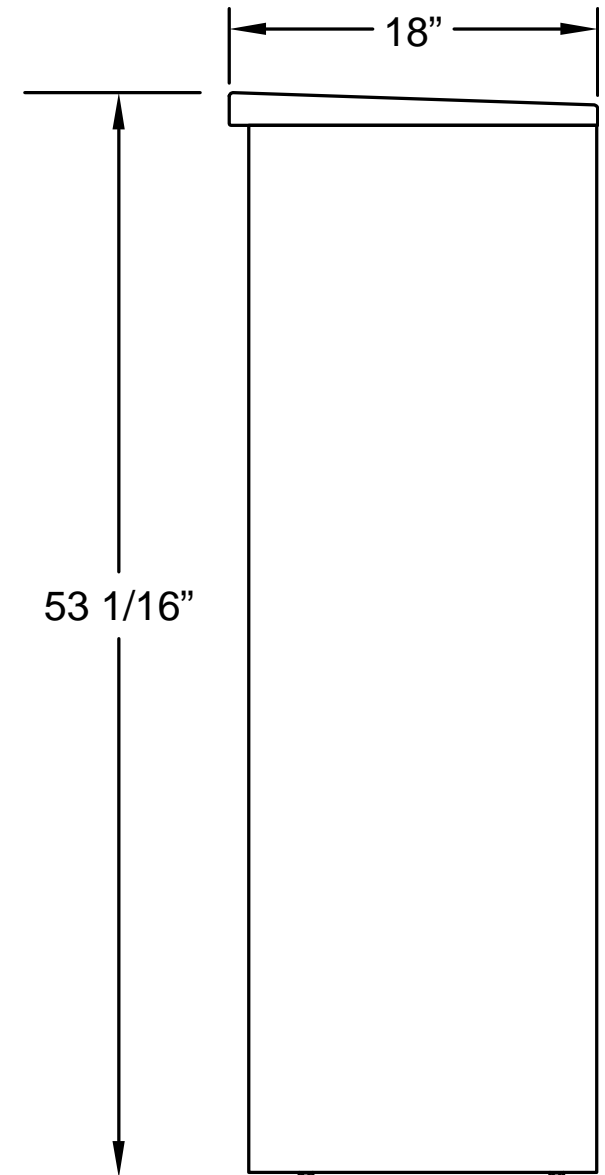

1. **Models Used:** (1)4C06S-1P-D
2. **Installation:** depot
3. **4C Finish:** tbd, **Depot Color:** tbd
4. **Locks:** Standard
5. **Door Id:** tbd
6. Matching Standard Attached Trim

**Florence versatile™ 4C Mailbox Suites**

Florence 4C mailboxes are USPS approved. Your installation/layout must also meet a 1:5 parcel locker to mailbox ratio and installation requirements (see next page) if serviced by the U.S. Postal Service. Please contact your local Post Office© if you have any compliance questions re: your specific project.

**DO NOT SCALE OFF DRAWING**


**4C DOOR SIZES**

**6 High parcel:** 20-1/2" H x 12" W

<b>ELEVATION:</b> Elevation 1   <b>MAILBOXES:</b> 0   <b>PARCELS:</b> 1			
<b>PROJECT NAME:</b> USMS		<b>DRAWN BY:</b>	
<p><b>FLORENCE</b> CORPORATION</p> <p>5935 Corporate Drive • Manhattan, KS 66503 www.florencemailboxes.com • 800.275.1747</p> <p>A GIBRALTAR INDUSTRIES COMPANY</p>		<b>DATE:</b> 12-29-2020	<b>P.O. NO:</b>
		<b>SCALE:</b> NONE	<b>QUOTE NO:</b>
		<b>DRAWING NO.</b> WEB-168158	<b>SHEET 1 OF 3</b>

## Sample Installation Dimensions

**Elevation 1 - 4C06**

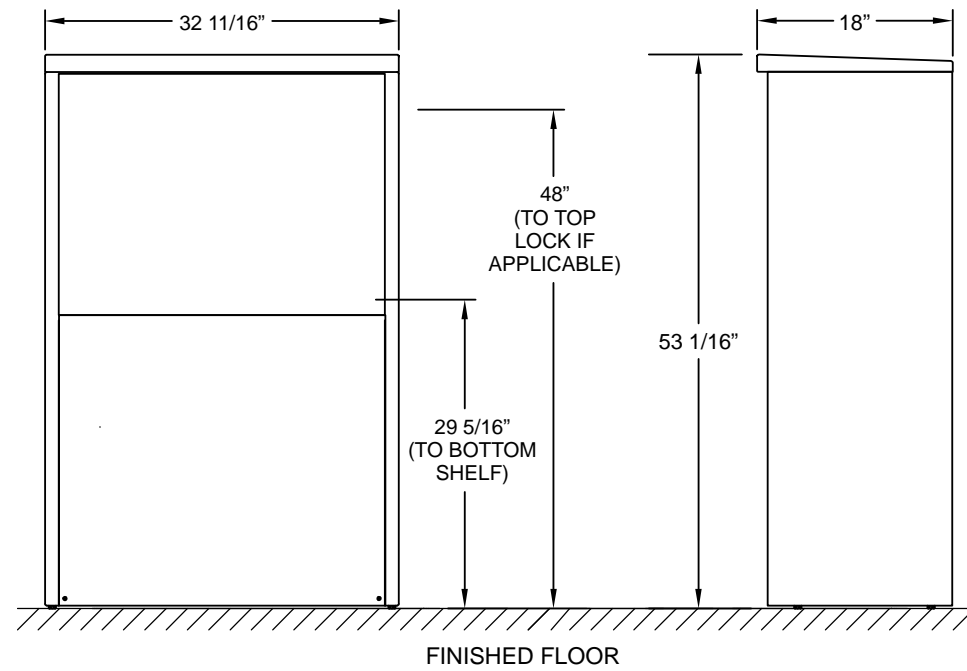

### Installation Requirements

The drawings shown above represent minimum installation requirements for 4C installation. Dimensions shown are simply for reference purposes. Installers should use the following guidelines when installing for USPS mail delivery (private delivery installs should follow these rules for accessibility, but are not required.)

1. At least one customer compartment shall be positioned less than 48 inches above the finished floor.
2. No parcel locker compartment (interior bottom shelf) shall be positioned less than 15 inches above the finished floor.
3. No customer lock shall be located more than 67 inches above the finished floor.
4. No customer compartment (interior bottom shelf) shall be positioned less than 28 inches above the finished floor.
5. The USPS Arrow lock shall be located between 36 and 48 inches above the finished floor.

**ELEVATION:** Installation Drawings

**PROJECT NAME:** USMS

**DRAWN BY:**

**FLORENCE**  
 CORPORATION  
 5935 Corporate Drive • Manhattan, KS 66503  
 www.florencemailboxes.com • 800.275.1747  
 A GIBALTAR INDUSTRIES COMPANY

**DATE:** 12-29-2020

**P.O. NO:**

**SCALE:** NONE

**QUOTE NO:**

**DRAWING NO.**  
WEB-168158

**SHEET 2 OF 3**

## Configuration Summary

**PROJECT NAME:** USMS  
**PRODUCT TYPE:** 4C  
**INSTALLATION:** depot

**4C MODELS USED:** (1)4C06S-1P-D  
**TOTAL MAILBOXES:** 0  
**TOTAL PARCELS:** 1

**COLOR:** tbd  
**LOCK TYPE:** Standard  
**DOOR IDENTIFICATION:** tbd

**DELIVERY MODE:** all  
**ADA COMPLIANCE:** Meets Minimum Requirements

The information above represents the totals for the entire project, across all elevations.

**ELEVATION:** Configuration Summary

**PROJECT NAME:** USMS

**DRAWN BY:**

**FLORENCE**  
CORPORATION  
5935 Corporate Drive • Manhattan, KS 66503  
www.florencemailboxes.com • 800.275.1747  
A GIBALTAR INDUSTRIES COMPANY

**DATE:** 12-29-2020

**P.O. NO:**

**SCALE:** NONE

**QUOTE NO:**

**DRAWING NO.**  
WEB-168158

**SHEET 3 OF 3**